

Data sheet

E-90-H: Exterior 90 to 240 minute FRR hinged door, single or pair

- Our most popular 90, 120, 180 or 240 minute FRR hinged exterior fire, smoke and acoustic door set, the E-90-H is available in singles or pairs. The door leaf is a mineral core faced on all sides and edges with 1mm steel (E-CORE). The standard door set is supplied in plain galvanised or zincalume finish. Leaf sizes up to 2440 high x 1200 wide per leaf.
- Thickness 44 – 55 mm
- Weight 28.2 kg /m²
- Acoustic singles and doubles up to STC 35. Call us on 09 579-8895 for bespoke engineered solutions to higher STC ratings.

FACING OPTIONS

- Paint quality galvanised or zincalume steel
- Powder coat finished (surcharge applies)



LEAF EDGE DETAILS

- 39 x 12 integral rail (all edges) under folded steel capping



PAIR MEETING STYLES

Aluminium



C/C

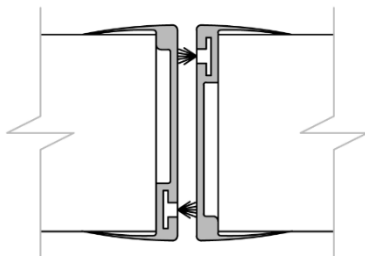

C/J

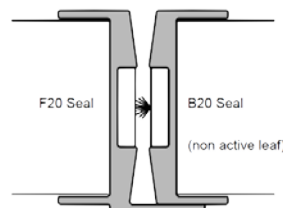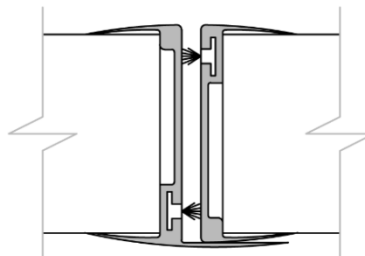

J/J




JAMB TYPES AND PROFILES

1.6 mm electrogalv steel (types 5, 6, 7 & Speedwall), paint quality or powdercoat options available


T5 – Steel

Steel width 111 – 350 mm

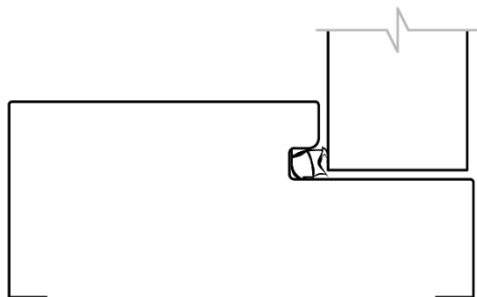


T6 – Steel

Steel width 146 – 208mm

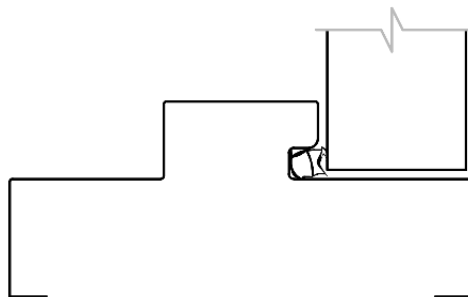


T7 – two piece split steel

Ideal for retrofit situations. No additional charge. Min 104mm if masonry wall, Min 112mm if stud wall – no max..

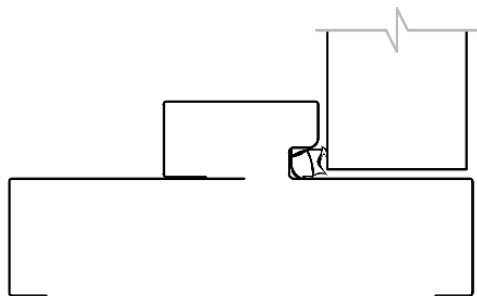

Steel Speedwall

Requires Speedwall C track (80mm end cap), (Max - /120/30sm)



SIDELIGHTS AND OVERLIGHTS

Not available for 90+ minute FRR fire door sets

APPROVED HARDWARE

The minimum requirement is for a fire door to be self-closing and self-latching. Hardware must be selected from NZ Fire Doors' Approved Hardware list from the column '90, 120 min'. Fitting any hardware that inhibits self-closing or self-latching is not approved by NZS 4520

IMPORTANT: Fitting untested or inappropriate hardware may affect the performance of the door and will void the warranty